




Digital Mixer Amplifier(Phone Jack Mic Input)

T-60D/T-120D/T-240D/T-350D/T-500D/T-60DV/ T-120DV/T-240DV/T-350DV/T-500DV

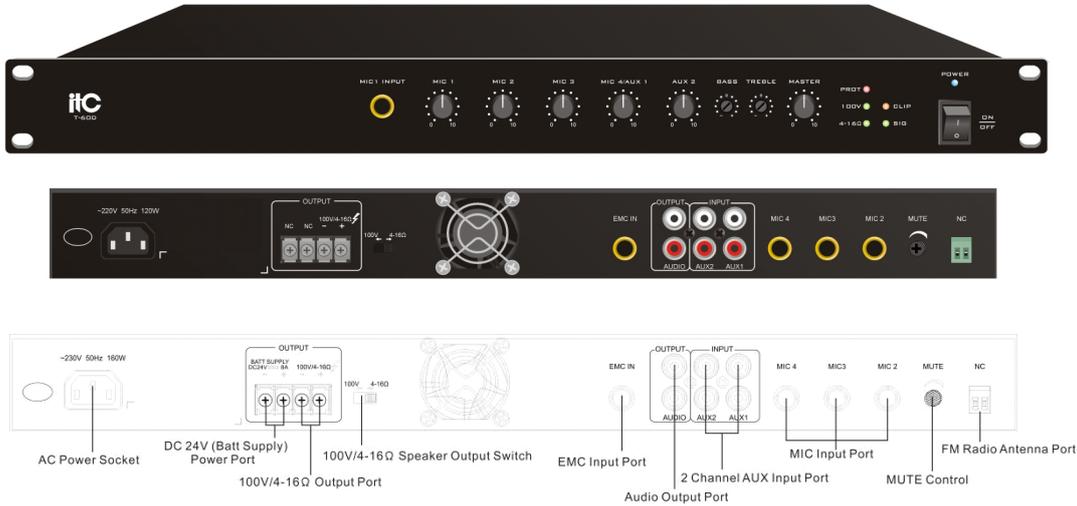

Description:

* Digital Mixer Amplifier.

* It is used for background music playback of small and medium-sized indoor venues such as small and medium-sized supermarkets, shopping malls, and leisure cafes.

Features:

* Standard cabinet design (1U), exquisite SMT process design.

* 1 EMC input, 2 AUX inputs, 4 MIC inputs.

* Channel priority function: EMC>MIC1>MIC2, MIC3, AUX1, AUX2.

* Each input has independent volume adjustment, and the total volume has treble, bass adjustment and volume control function.

* The device is equipped with level indication, overload and protection indicators.

* The device has good self-protection such as short circuit, overload and overheating.

* Two output modes: 100V, 4-16Ω.

* The high-efficiency energy-saving switching power supply is perfectly combined with the high-energy saving and ultra-stable design of class D digital power amplifier.

* Wide voltage supply: 180V-240V can work normally.

Specifications:

Model	T-60D/T-60DV	T-120D/T-120DV	T-240D/T-240DV	T-350D/T-350DV	T-500D/T-500DV
Output Terminals	4-16Ω, 100V				
Output Power	60W	120W	240W	350W	500W
Input Sensitivity & Impedance	MIC1, 2, 3, 4 input:5mV/600Ω unbalanced 6.3 connector AUX1, 2 input:350mV/10KΩ unbalanced RCA connector EMC input:775mV/10KΩ unbalanced 6.3 connector MIX OUT:1000mV/470Ω unbalanced RCA connector				
Output Sensitivity & Source Impedance					
Tone	Bass:±10dB at 100Hz Treble:±10dB at 10KHz				
Frequency Response	80Hz~16KHz(+1dB,-3dB)				
SNR	MIC1, 2, 3: 66dB; AUX1, 2: 80dB				
THD	Less than 0.5%(@1KHz, 1/3 rated power)				
Mute	MIC 1 prior to MIC2-4,AUX1-2 audio input, EMC prior to all audio input				
Channel Crosstalk	≥50dB				
Attenuation	Forced fan cooling after side entry, fan start after start,				
Cooling	stepless speed change processing				
Protection	Overheating protection, over current protection, short circuit protection				
Power Supply	~220-240V /50Hz				
Power Consumption	100W	160W	300W	500W	650W
Dimension	484×300×44mm				
Weight	3.2Kg	3.6Kg	3.7Kg	3.9Kg	4.0Kg